


### TYPICAL CABLE LABELING METHOD

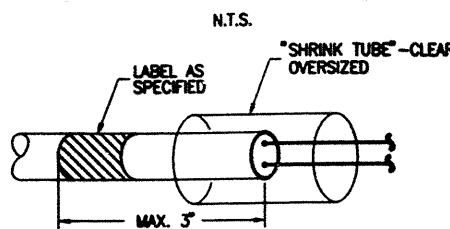

- APPLY LABEL TO OUTER JACKET OF CABLE MAXIMUM OF 3" FROM STRIPPED END AS SHOWN NOT TO BE COVERED BY OVERSIZED SHRINK.
- DETAIL APPLIES TO ALL CABLE TYPES

### CIRCUIT LEGEND:

CIRCUIT DESIGNATION	
STR-A OR STR-A	CABLE IDENTIFICATION TAG; LIGHT TEXT REPRESENTS EXISTING CABLE TAG TO REMAIN, HEAVY TEXT REPRESENTS THE TAG (BRADY LABEL #WML-305-292 O.A.E.) TO BE FURNISHED & INSTALLED.
TYPE OF CIRCUIT.	CIRCUIT NUMBER OR NAME.
STR - STROBE CIRCUIT.	A TO G - STROBE OR SPEAKER CIRCUIT NUMBER
SPK - SPEAKER CIRCUIT.	CIRCUIT TO ADDRESSABLE "FANAL" STRIP CABINET.
ALD - ALD LOOP DEVICE CIRCUIT (EXCEPT SMOKE DETECTOR).	ATC - CIRCUIT TO PULL STATION.
TEL - TELEPHONE CIRCUIT.	ELEV - CIRCUIT TO ELEVATOR LOBBY AND ELEVATOR
MD - SMOKE DETECTOR CIRCUIT.	MACH - MACHINERY ROOM CIRCUIT
MFJ - MAINTENANCE PHONE JACK CIRCUIT	HWAC AREA - CIRCUIT TO HWAC SMOKE DETECTOR
WDRN - WARDEN TELEPHONE CIRCUIT	CIRCUIT TO OPEN AREA SMOKE DETECTOR
SP - STAND PIPE PHONE JACK CIRCUIT	INTERC - INTERCOM CIRCUIT
	TIB - TENANT INTERFACE BOX